




DAUBRITE® NF

VCI EMITTER CUM DESICCANT

TECHNOLOGY

DAUBRITE® NF work with a unique action of absorbing moisture in the enclosed space and emitting VCI molecules for corrosion prevention.

DAUBRITE® DESICCANT CUM VCI TECHNOLOGY

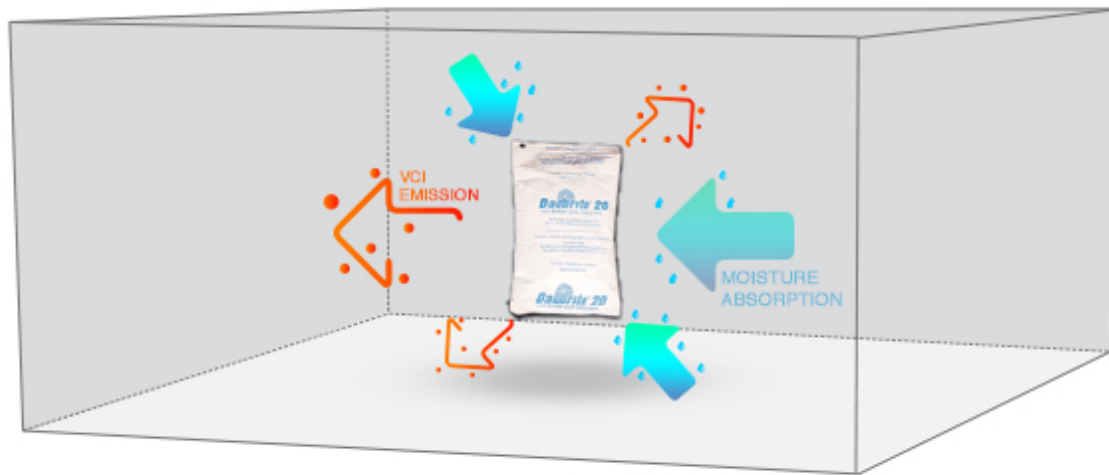

FEATURES

Excellent for Enclosed spaces

Multi-metal protection


Protects even in the presence of moisture

Desiccant cum VCI


Protects void spaces for upto 2 years

Easy to use

DESICCATING PERFORMANCE of its own weight

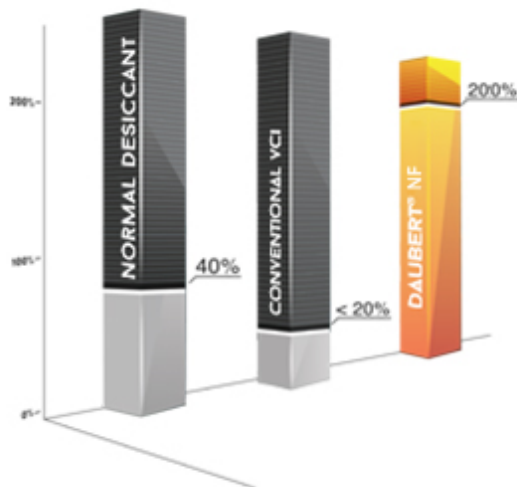

MOISTURE RELEASE PERFORMANCE

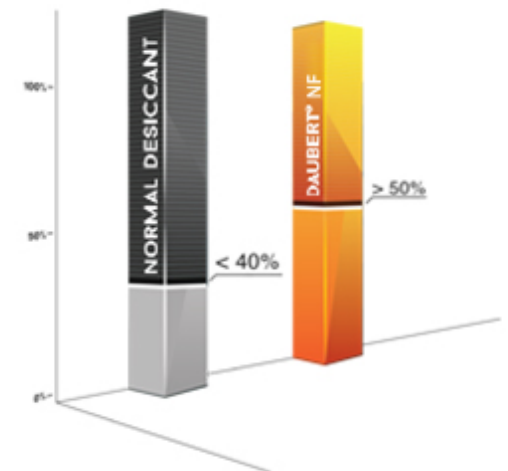

PRODUCT GUIDE

PARAMETER	DAUBRITE® NF 8 GMS	DAUBRITE® NF 134 GMS
GENERAL	Proprietary VCI & Clay desiccants filled in Du Pont Tyvek® pouch for VCI protection as well as excellent desiccant action	Proprietary VCI & Clay desiccants filled in Du Pont Tyvek® pouch for VCI protection as well as excellent desiccant action
VCI PROTECTION	1 cubic feet (28 Liters)	20 cubic feet (560 Liters)
MAX.MOISTURE ABSORBITION	> 10 Grams	>200grams
CORROSION PROTECTION	Multi metal protection for upto 2 years	Multi metal protection for upto 2 years
DIMENSIONS	92 x 55mm	200 x 110mm
TOTAL PRODUCT WEIGHT	8 grams	134 grams